

## HD24405

## 2200 – 3200MHz Low Noise Amplifier

### Features

- Frequency Range: 2.2-3.2GHz
- Gain: 23dB
- P<sub>1dB</sub>: +10dBm
- IP3: +20dBm
- Noise Figure: 1.7dB
- DC Power: 12V
- SMA Connector

Performance measured @ 2.7GHz

### Description

HD24405 is a wideband Low Noise Amplifier operates with frequency range usable from 2.2GHz to 3.2GHz.









### Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	2.2		3.2
Gain	f = 2.2GHz		24	
	f = 2.7GHz		23	
	f = 3.2GHz		24	
P <sub>1dB</sub>	f = 2.2GHz		+10	
	f = 2.7GHz		+10	
	f = 3.2GHz		+10	
IP3	f = 2.7GHz		+20	
Noise Figure	f = 2.2GHz		2.0	
	f = 2.7GHz		1.7	
	f = 3.2GHz		1.8	
VSWR	f = 2.7GHz			
	Input VSWR		2.5:1	
	Output VSWR		1.5:1	
DC Power Supply	V	6	12	15
Supply Current	mA		45	

**HD24405**

**2200 – 3200MHz Low Noise Amplifier**

**Typical Performance @ +25 °C**

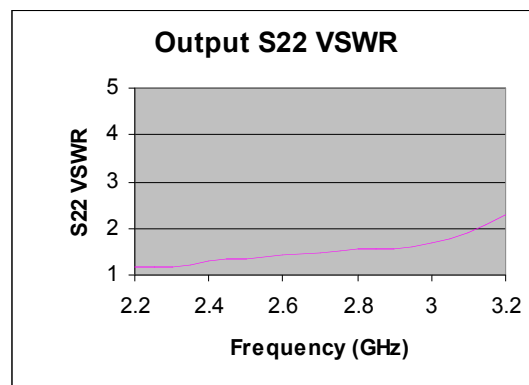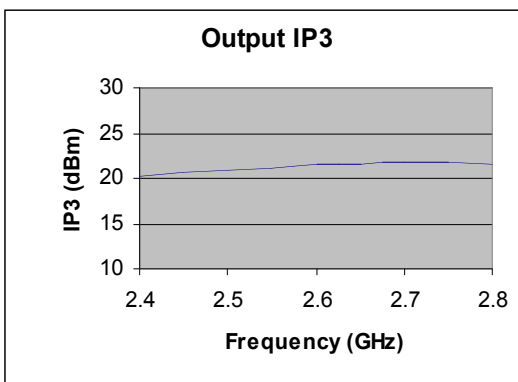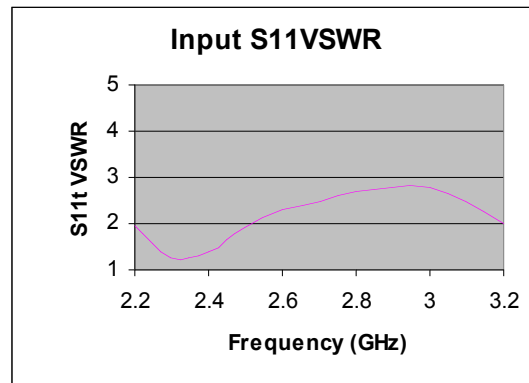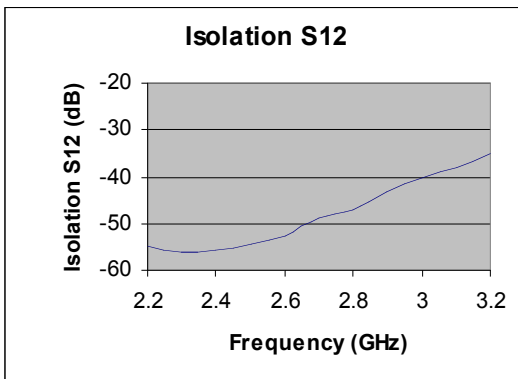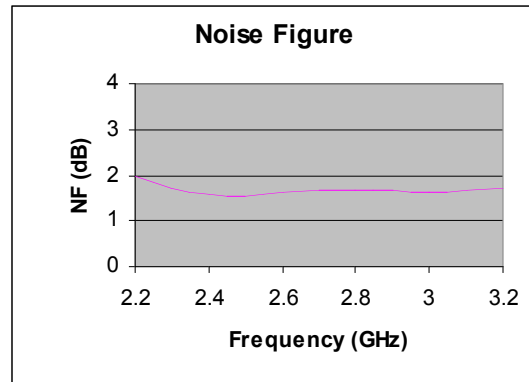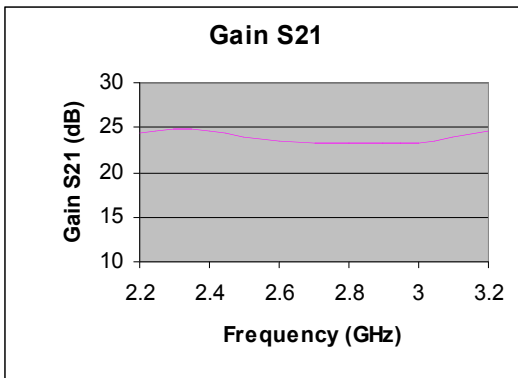


## HD24405

## 2200 – 3200MHz Low Noise Amplifier

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### Outline

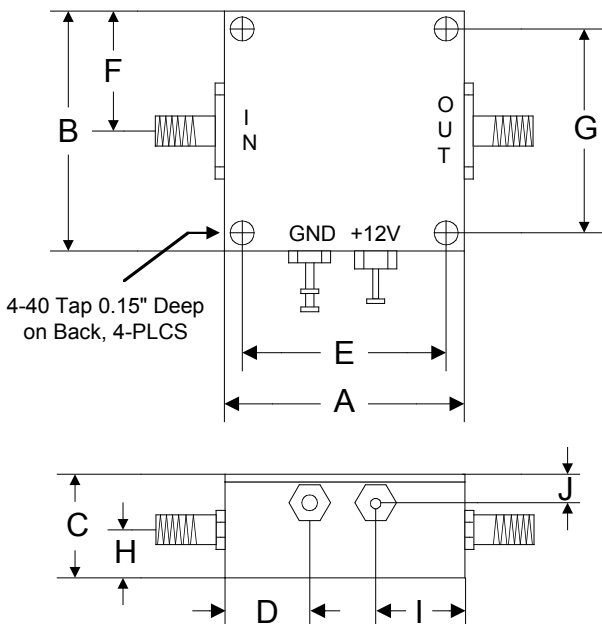

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76