

HD25099

0.1 – 15GHz Divide-By-7 Prescaler

Features

- Input Frequency: 0.1-15GHz
- Output Frequency: 0.014-2.14GHz
- Divide Ratio: 7
- Output Power: 4dBm
- Phase Noise: -153dBc/Hz
- DC Power: 5V/205mA
- SMA Connector



Description

HD25099 is a wideband frequency 0.1 – 15GHz divider with divide ratio of 7.

Electrical Specifications @ +25 °C, $Z_s = Z_L = 50$ Ohms

Parameter	Unit	Minimum	Typical	Maximum
Input Frequency Range	GHz	0.1		15
Output Frequency Range	GHz	0.0142		2.142
Fixed Divide Ratio		7		
Input Power Range				
f = 0.1GHz – 0.25GHz	dBm	4		+10
f = 0.25GHz – 1GHz	dBm	-8		+10
f = 1GHz – 2GHz	dBm	-18		+10
f = 2GHz – 10GHz	dBm	-23		+10
f = 10GHz – 15GHz	dBm	-19		+10
Output Power				
f = 0.1GHz – 1GHz	dBm		+5	
f = 1GHz – 10GHz	dBm	+3	+4.5	
f = 10GHz – 15GHz	dBm	+3	+4	
SSB Phase Noise (100KHz Offset)	dBc/Hz		-153	
DC Power Supply	V		5	

HD25099


0.1 – 15GHz Divide-By-7 Prescaler

Supply Current	mA		205	
----------------	----	--	-----	--

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

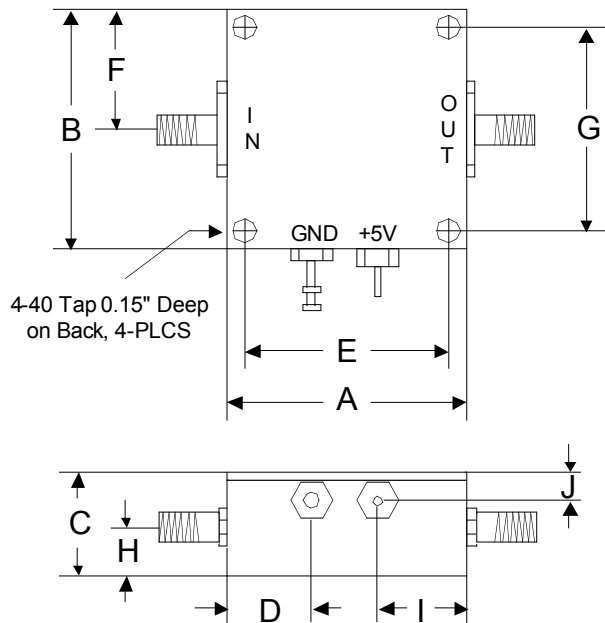

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76