


HD26216

5-1000MHz Frequency Mixer

Features

- LO/RF: 5-1000MHz
- IF: DC-1000MHz
- LO Level: +7dBm
- Conversion Loss: 7dB
- RF Input: Up to +1dBm
- Input IP3: +20dBm
- SMA Connector

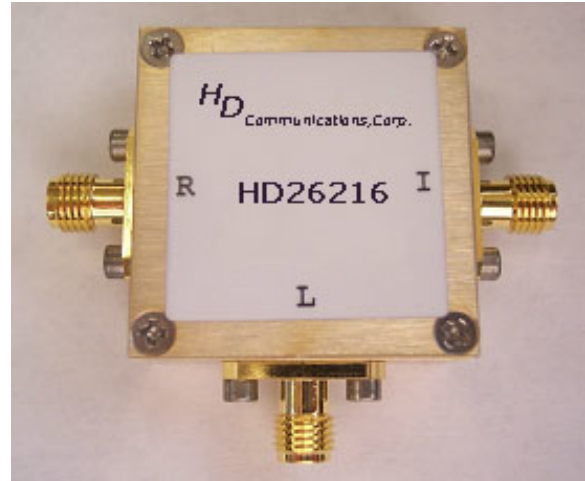

Description

HD26216 is a passive High IP3 double balanced mixer operates with LO drive level range of +3dBm to +10dBm.

Electrical Specifications @ +25°C, LO= +7dBm







Parameter	Unit	Minimum	Typical	Maximum
Frequency Range				
LO/RF	MHz	5		1000
IF	MHz	DC		1000
Conversion Loss	dB		7.0	8.0
LO-RF Isolation				
5-50 MHz	dB	40	60	
50-500MHz	dB	25	47	
500-1000MHz	dB	22	32	
LO-IF Isolation				
5-50MHz	dB	35	62	
50-500MHz	dB	25	45	
500-1000MHz	dB	20	32	
RF Input Power up to	dBm		+1	
IP3 (Center Band)	dBm		+20	

HD26216

5-1000MHz Frequency Mixer

Typical Performance @ +25 °C

LO = +7dBm

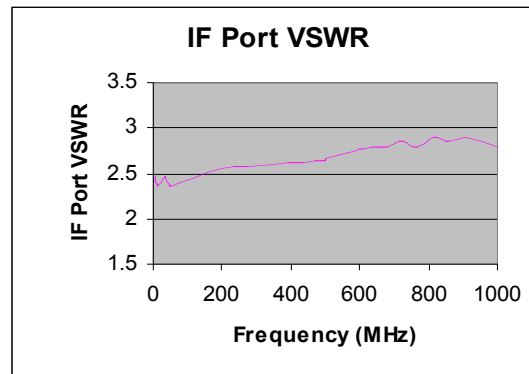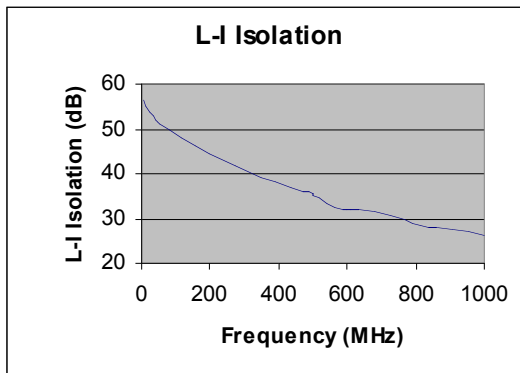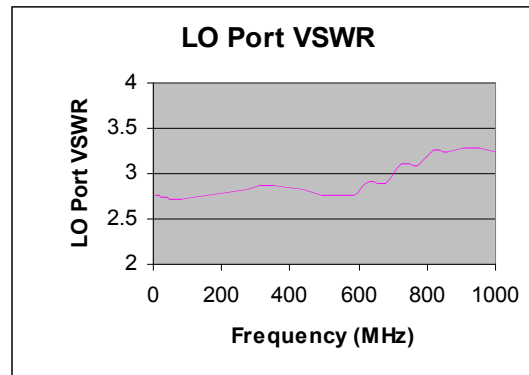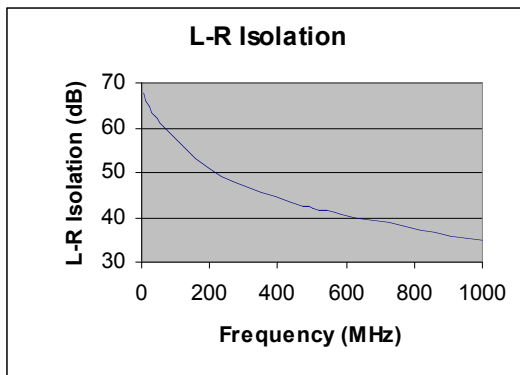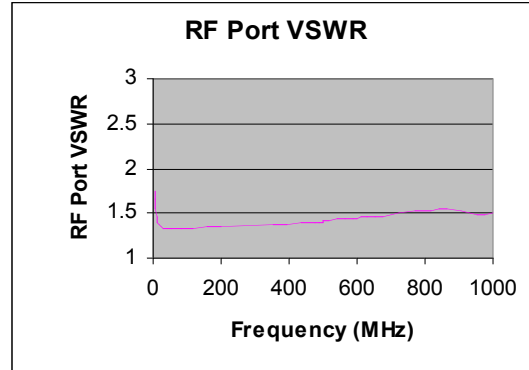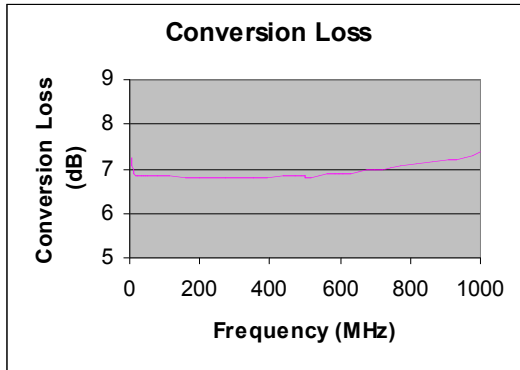


HD26216

5-1000MHz Frequency Mixer


Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	+17dBm
Peak IF Current	40mA
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Schematic

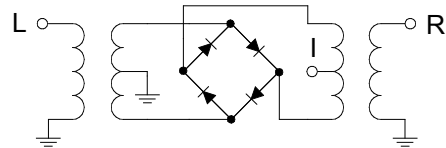

Outline

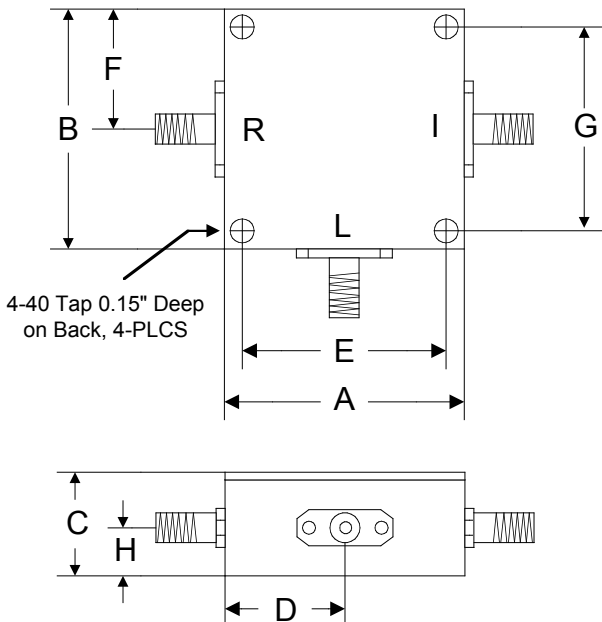

	A	B	C	D	E	F	G	H
Inch	1.250	1.250	0.563	0.625	1.000	0.625	1.000	0.250
mm	31.75	31.75	14.29	15.88	25.40	15.88	25.40	6.35