

Features

Center Frequency: 345 MHz

Pass Band: 660-680 MHz



Insertion Loss: 4.5 dB

Input/ Output Impedance: 50 Ohms

Maximum Input Power: 1 W

VSWR: 1.5:1

SMA Female Connectors

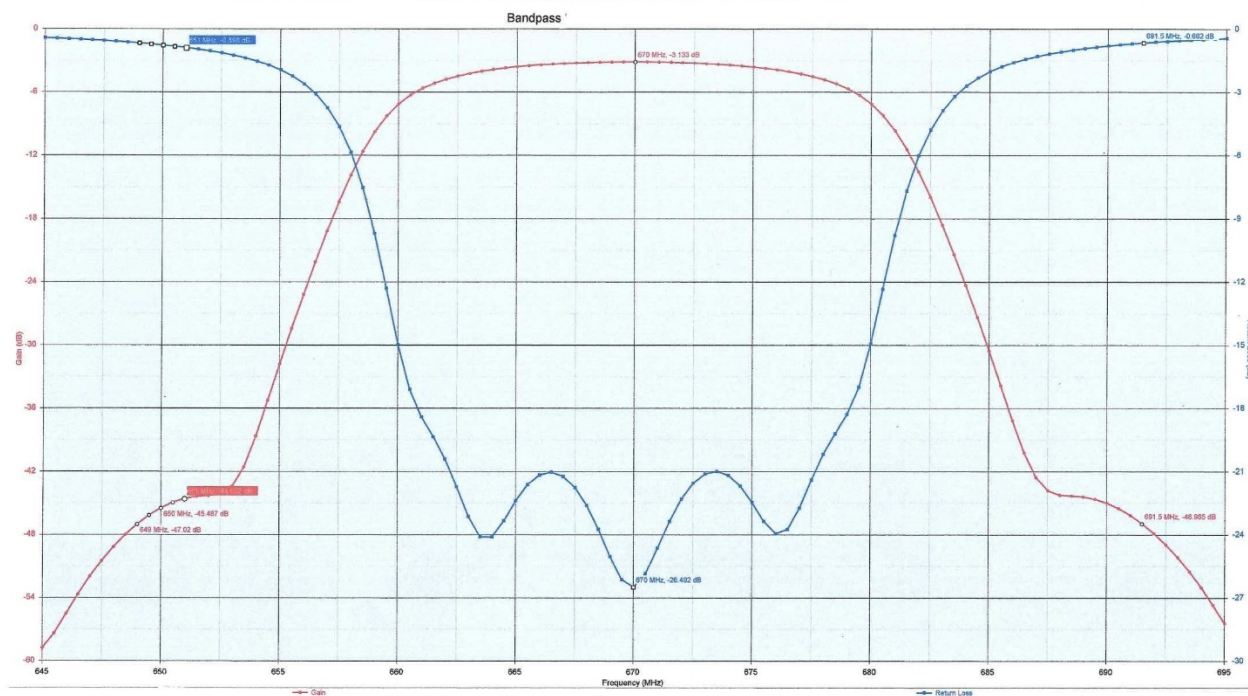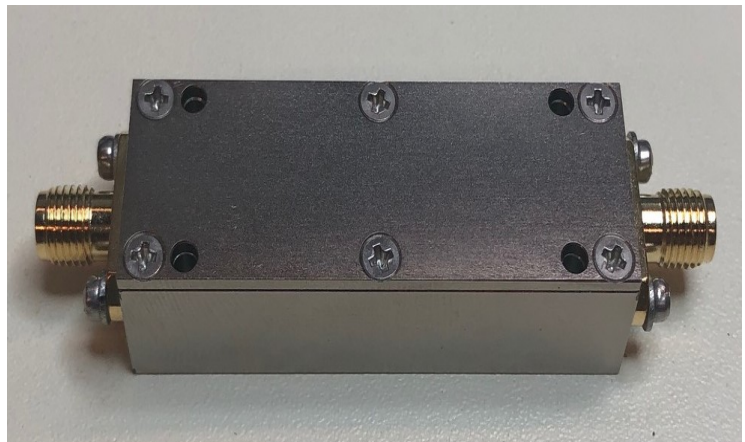

332C Dante Ct. Holbrook, NY 11741 Phone: 631-588-3877 Fax: 631-648-0518

www.rfamplifiers.com www.rfcomp.com sales@hdcom.com

