


HD34160

Band Pass Filter

■ Mechanical Drawing

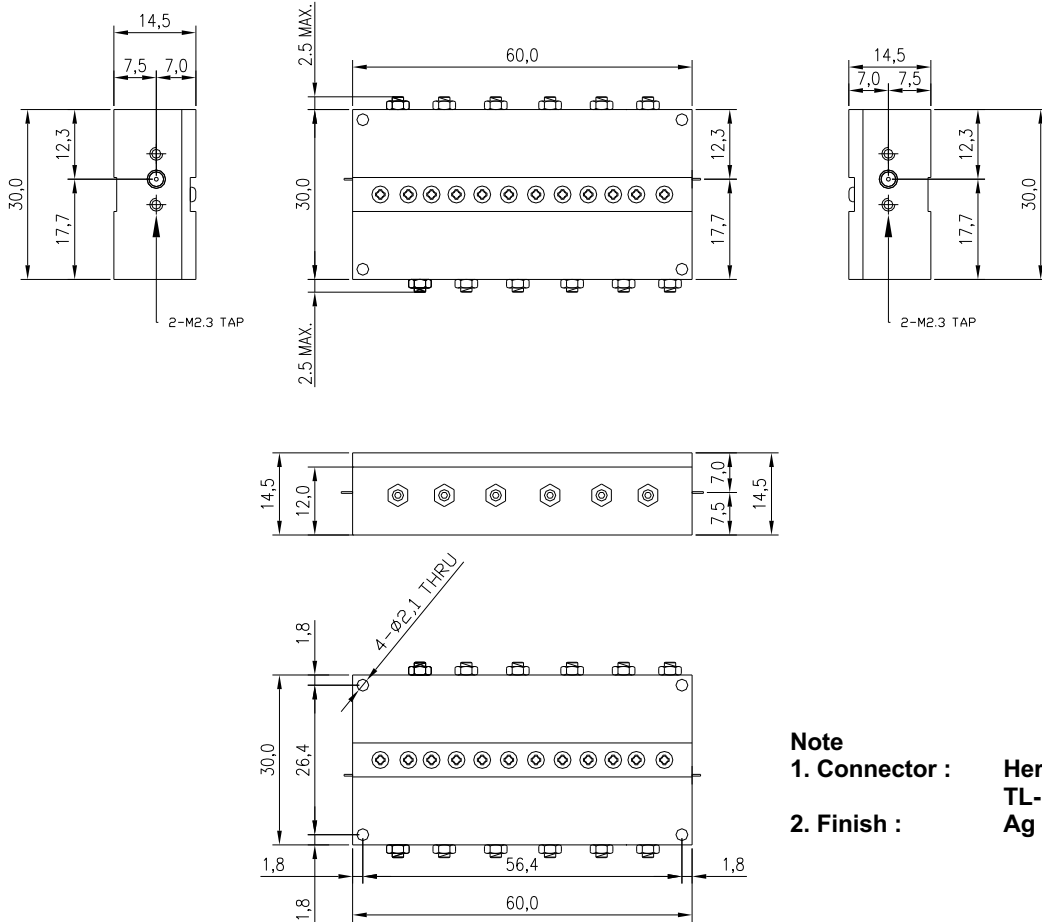

Note
1. Connector : Hermetic Seal TL-106 (12Mil)
2. Finish : Ag Plating

HD34160

Band Pass Filter



■ **Electrical Specification**

Parameter		Specification	Remark
1. Center Frequency		1365MHz	
2. Passband		1030 ~ 1700MHz (Fc ± 335MHz)	
3. Insertion Loss		3.5dB Max.	
4. Return Loss		10dB Min.	
6. Rejections	DC ~ 960MHz	20dB Min.	
	1800 ~ 6000MHz	20dB Min.	
7. Phase Matching		< 30°	In a group of 4
8. Operating Temperature		0°C ~ +60°C	
9. Power Handling		3W Max.	
10. Size (W × D × H)		30.0 × 60.0 × 14.5mm	

HD34160

Band Pass Filter

■ Data Curve

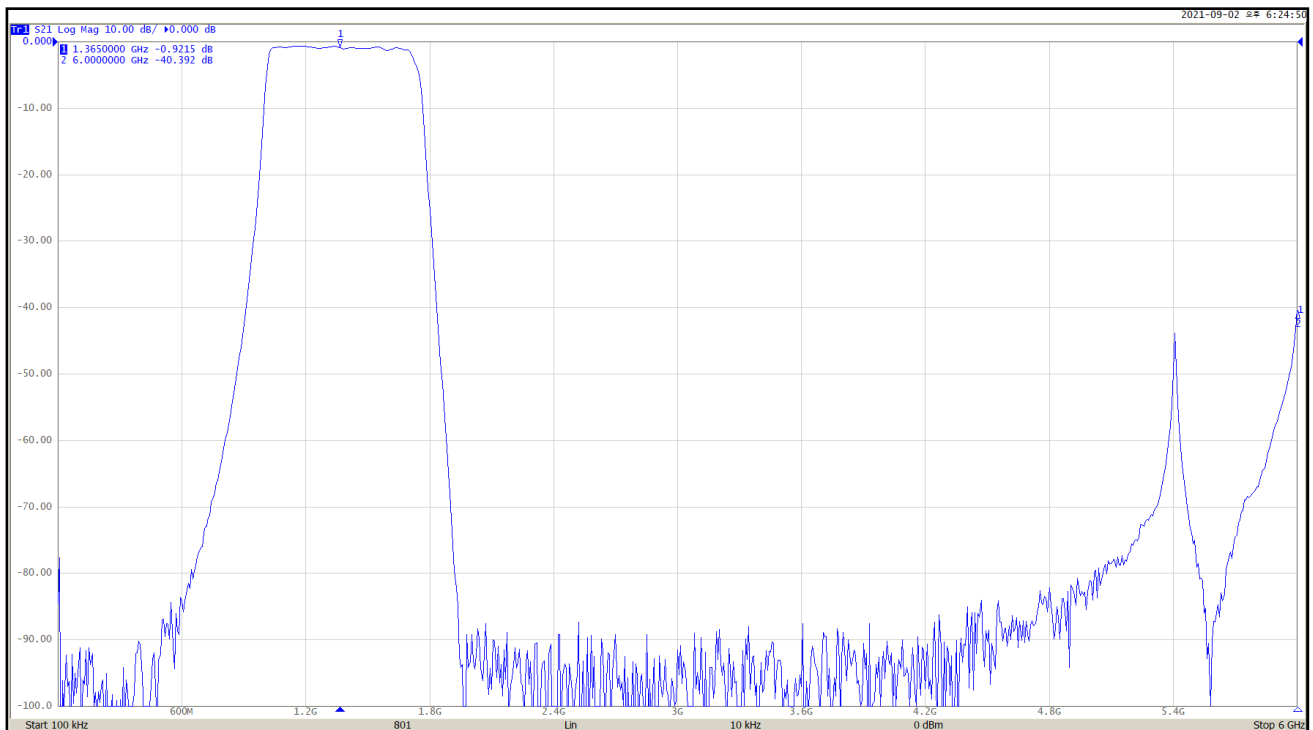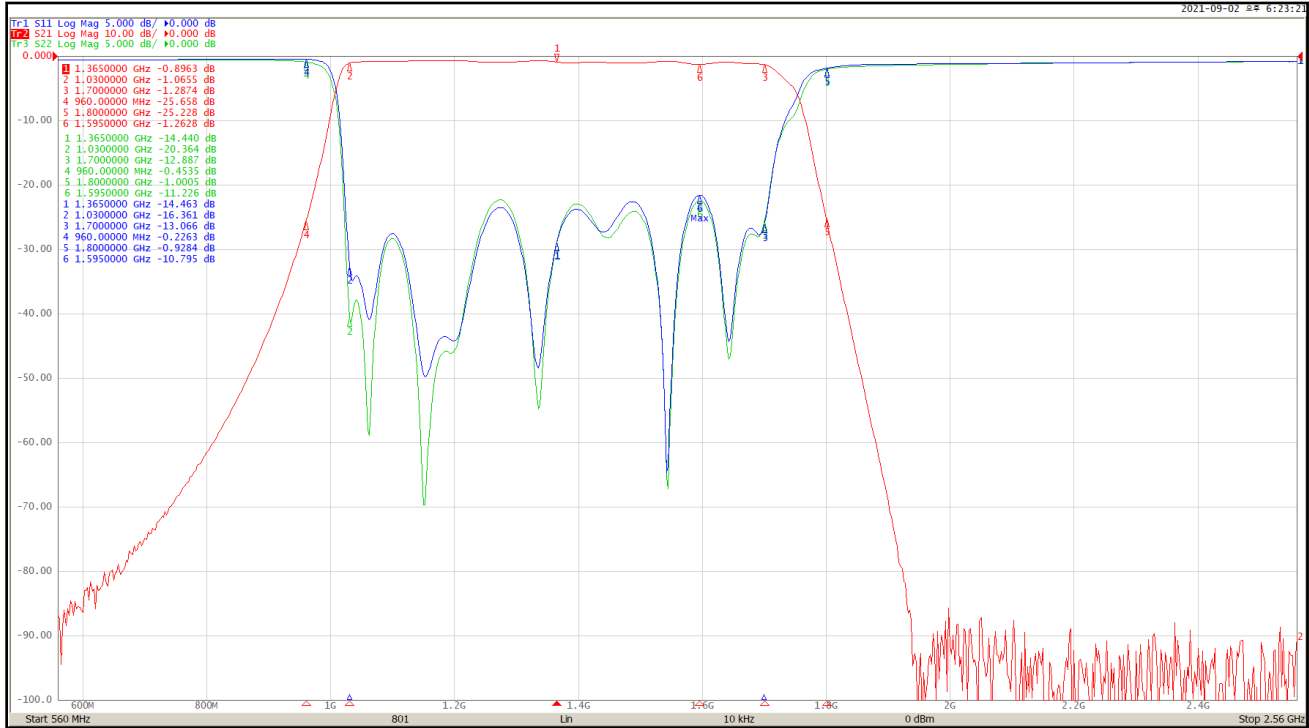

338 Jericho Tpke. Ste 387, Syosset, NY 11791

Tel: (631) 588-3877 Email: sales@hocom.com

© COPYRIGHT 2008-2023 HD Communications Corp.

All rights reserved. Redistribution or republication of these pages in any form requires express written consent.