


■ Mechanical Drawing

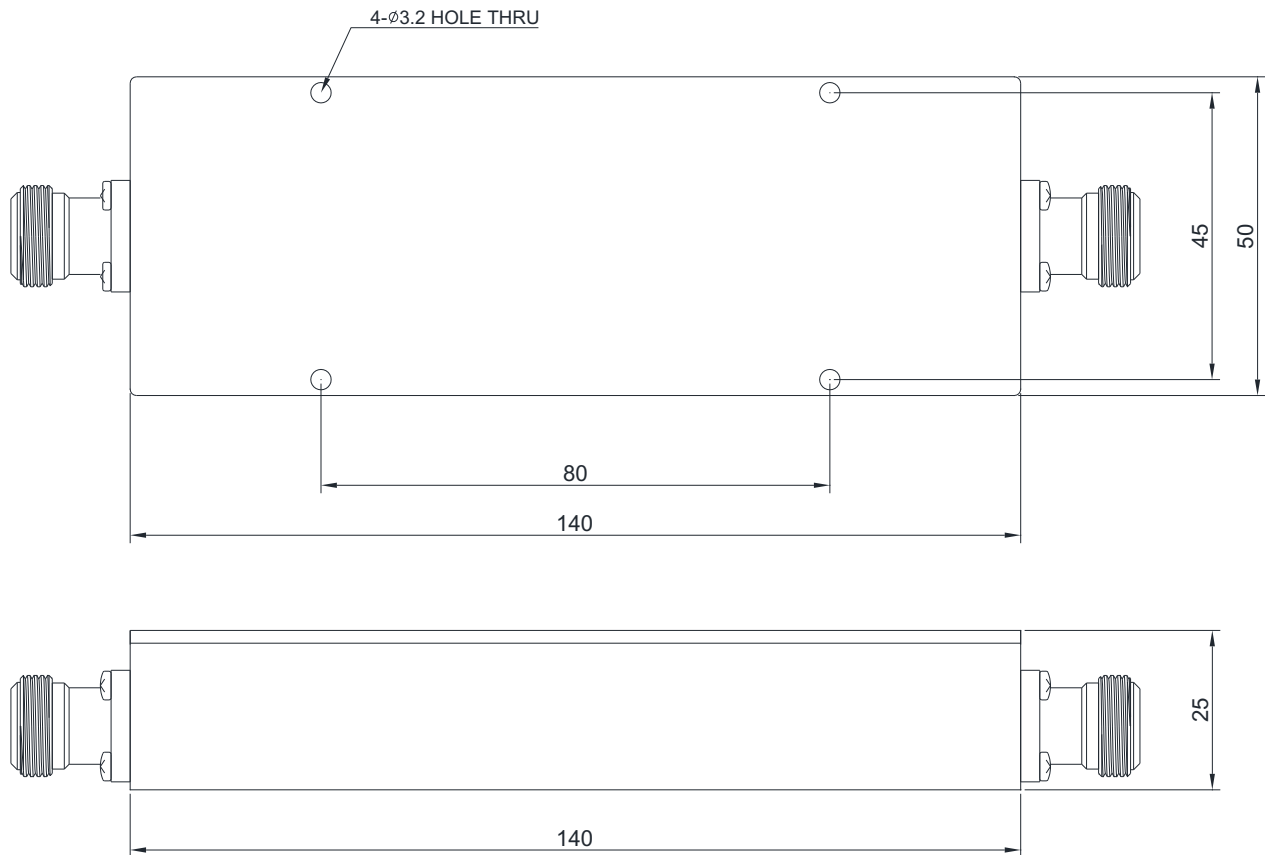

- Note**
- 1. Connector : N-type(F)
 - 2. Finish : Black epoxy
 - 3. Mounting : 4x holes

HD34162

LC Band Pass Filter

■ **Electrical Specification**

Parameter		Specification	Remark
1. Center Frequency [Fc]		160MHz	
2. Pass Band [1dB BW]		155~165MHz (Fc ± 5MHz)	
3. Insertion Loss		1.5 dB Max.	
4. VSWR		1:1.5 Max.	
5. Rejection	DC~110MHz	60 dB Min.	
	240~6000MHz	50 dB Min.	
6. Power Handling		10W CW	
7. In/Out Impedance		50Ω	
8. Size		140.0 × 50.0 × 25.0 mm	proposal

Remarks: This is a preliminary datasheet for reference. The final performance is subject to the sample.

■ **Environmental Specification**

Parameter		Specification	Remark
1. Operation Temperature		-20°C ~ +80°C	
2. Storage Temperature		-20°C ~ +80°C	
3. Relative Humidity		10% ~ 95%	
4. Random Vibration		MIL-STD-810 F Method 514.4 Procedure C1. 3 Axis, 20 min per each axis	
5. Dust		MIL 810F Method 510.4 Procedure III settling dust	
6. Safety Requirement		Approved according to UL/CE or similar standards	

Remarks: This is a preliminary datasheet for reference. The final performance is subject to the sample.

HD34162

LC Band Pass Filter

■ Simulation Data

