Communications Corp.

HD34173 Cavity Band Pass Filter

PRELIMINARY SPECIFICATION

■ Mechanical Drawing

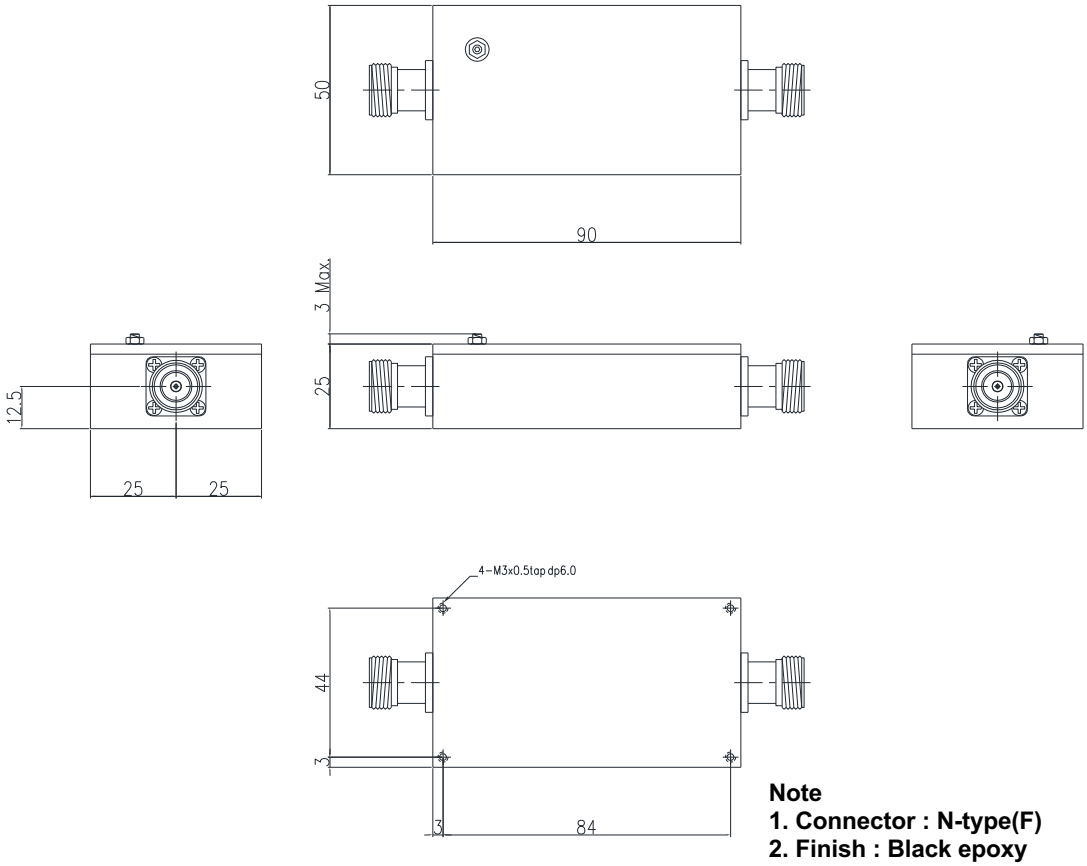

Note
1. Connector : N-type(F)
2. Finish : Black epoxy
3. Mounting : 4x holes

338 Jericho Tpke. Ste 387, Syosset, NY 11791
Tel: (631) 588-3877 Email: sales@hdcom.com

HD Communications Corp.

HD34173 Cavity Band Pass Filter

■ Electrical Specification

Parameter		Specification	Remark
1. Center Frequency [Fc]		2655MHz	
2. Pass Band [1dB BW]		2620~2690MHz (Fc ± 35MHz)	
3. Insertion Loss		1.5 dB Max.	
4. VSWR		1:1.4 Max.	
5. Rejection	DC~2570MHz	50 dB Min.	
	3500~6000MHz	60 dB Min.	
6. Power Handling		10W CW	
7. In/Out Impedance		50Ω	
8. Size		90.0 × 50.0 × 25.0mm	proposal

Remarks: This is a preliminary datasheet for reference. The final performance is subject to the sample.

■ Environmental Specification

Parameter	Specification	Remark
1. Operation Temperature	-20℃ ~ +80℃	
2. Storage Temperature	-20℃ ~ +80℃	
3. Relative Humidity	10% ~ 95%	
4. Random Vibration	MIL-STD-810 F Method 514.4 Procedure C1. 3 Axis, 20 min per each axis	
5. Dust	MIL 810F Method 510.4 Procedure Ⅲ settling dust	
6. Safety Requirement	Approved according to UL/CE or similar standards	

Remarks: This is a preliminary datasheet for reference. The final performance is subject to the sample.

338 Jericho Tpke. Ste 387, Syosset, NY 11791
Tel: (631) 588-3877 Email: sales@hdcom.com

HD Communications Corp.

HD34173 Cavity Band Pass Filter

■ **Simulation Data**

338 Jericho Tpke. Ste 387, Syosset, NY 11791
Tel: (631) 588-3877 Email: sales@hdcom.com