




PRELIMINARY SPECIFICATION

**Product Name : LC Band Pass Filter**

**Part No : HD34190**

## PRODUCT SPECIFICATION FOR INFORMATION

### ■ Mechanical Drawing

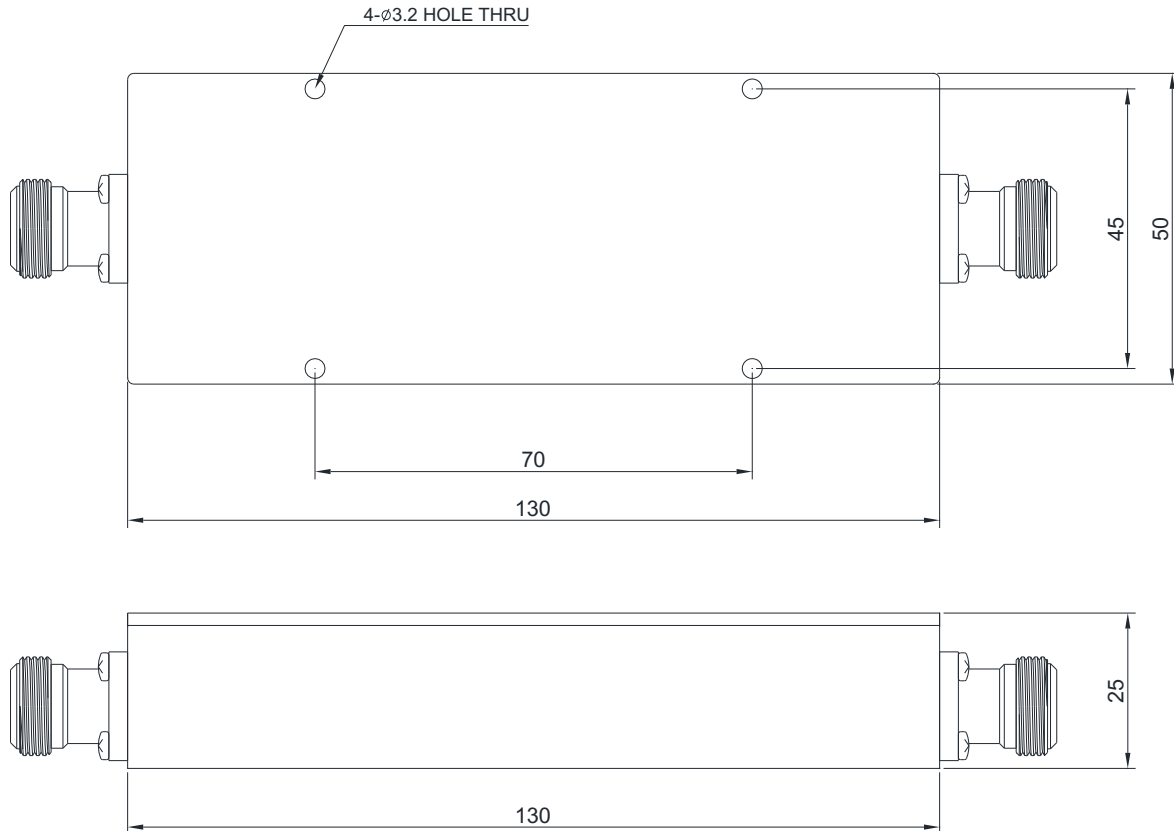

**Note**

1. Connector : N-type(F)
2. Finish : Black epoxy
3. Mounting : 4x holes

### ■ Electrical Specification

Parameter		Specification	Remark
1. Center Frequency [Fc]		425MHz	
2. Pass Band [1dB BW]		400~450MHz (Fc $\pm$ 25MHz)	
3. Insertion Loss		1.5 dB Max.	
4. VSWR		1:1.5 Max.	
5. Rejection	DC~260MHz	60 dB Min.	
	650~6000MHz	50 dB Min.	
6. Power Handling		10W CW	
7. In/Out Impedance		50 $\Omega$	
8. Size		130.0 $\times$ 50.0 $\times$ 25.0 mm	Proposal

Remarks: This is a preliminary datasheet for reference. The final performance is subject to the sample.

■ **Environmental Specification**

Parameter	Specification	Remark
1. Operation Temperature	-20°C ~ +80°C	
2. Storage Temperature	-20°C ~ +80°C	
3. Relative Humidity	10% ~ 95%	
4. Random Vibration	MIL-STD-810 F Method 514.4 Procedure C1. 3 Axis, 20 min per each axis	
5. Dust	MIL 810F Method 510.4 Procedure III settling dust	
6. Safety Requirement	Approved according to UL/CE or similar standards	

Remarks: This is a preliminary datasheet for reference. The final performance is subject to the sample.

■ **Simulation Data**

