


# **PRODUCT SPECIFICATION FOR INFORMATION**

PRELIMINARY SPECIFICATION

**Product Name: Ceramic Band Pass Filter**

**Part No: HD34288**

■ Mechanical Drawing

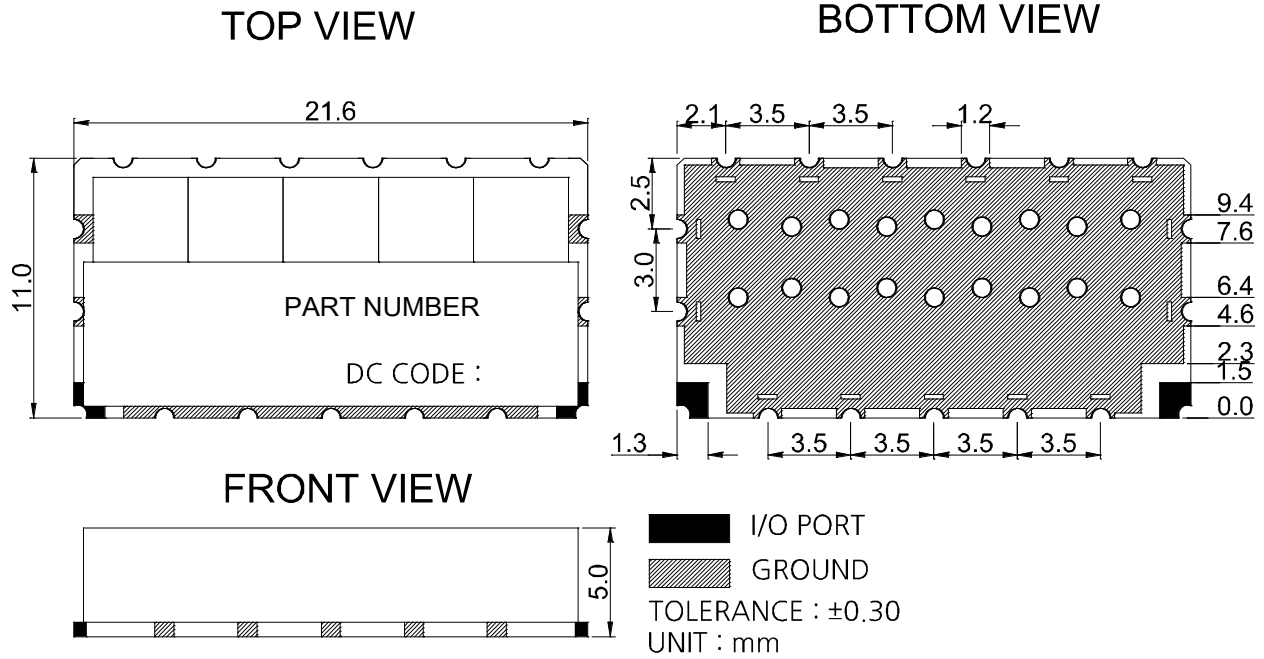


**Note**  
 1. Connector: SMD  
 2. Finish: Silver Plated

■ Electrical Specification


Parameter	Specification	Remark
1. Center Frequency	4000MHz	
2. Bandwidth [BW]	$F_c \pm 250\text{MHz}$ [3750~4250MHz]	
3. Insertion Loss in BW	2.0dB Max.	
4. Ripple in BW	0.5dB Max.	
5. Return Loss in BW	15dB Min.	
6. Attenuation [Absolute Value]	40dB Min.@ 750~1250MHz	
	40dB Min.@ 1875~2125MHz	
	40dB Min.@ 5000MHz	
	40dB Min.@ 5750~6250MHz	
7. In/Out Impedance	50Ω	
8. Input Power	1W Max.	
9. Operation Temperature Range	-40°C to +85°C	

Remarks: This is a preliminary datasheet for reference.

■ Simulation Data

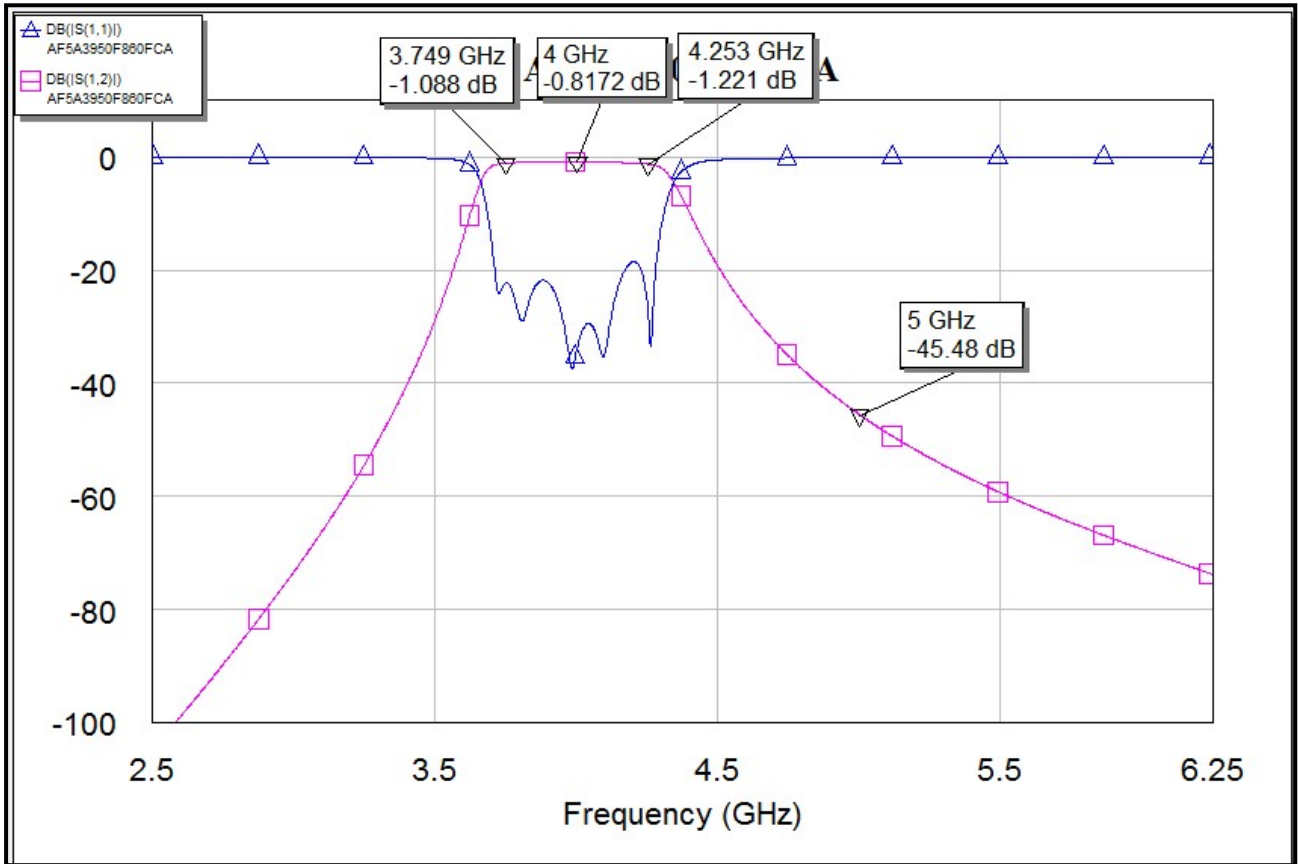

■ Recommended PC Board Pattern

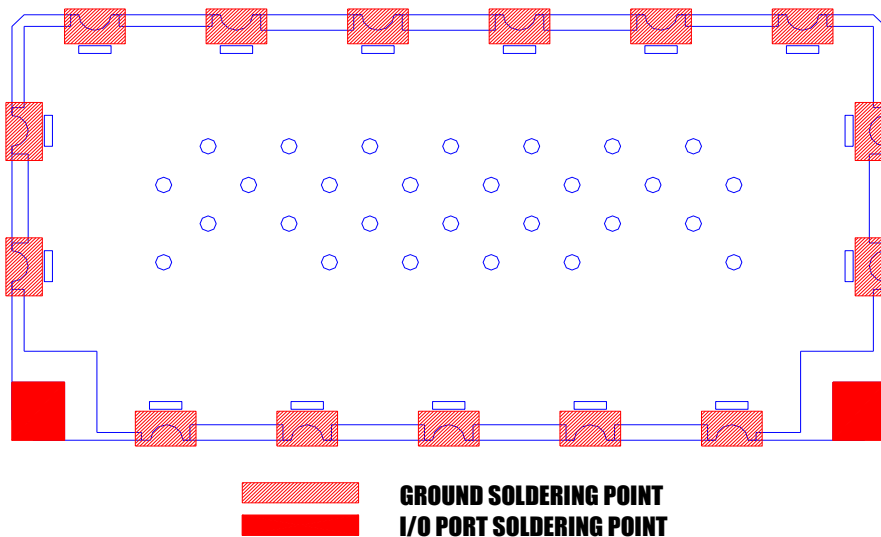

Remarks: Recommend using silver-containing solder paste.