

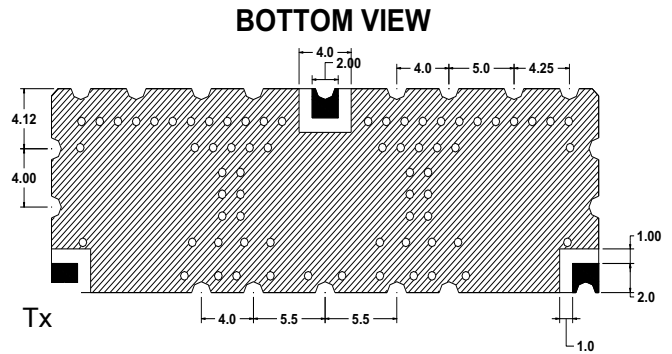


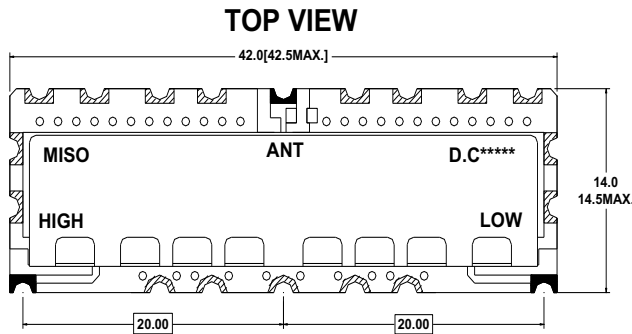

PRODUCT SPECIFICATION FOR INFORMATION

- Product Name : CERAMIC MONO DUPLEXER
- Part No : HD34304

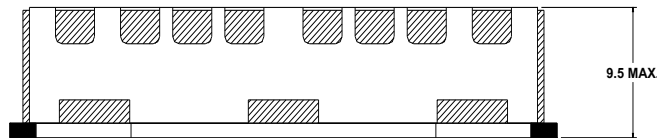



FRONT VIEW




 I/O PORT
 GROUND
 TOLERANCE : ± 0.20
 UNIT: mm

Item	SPECIFICATION	
1. Center Frequency (= Fc)	2575.0 MHz (Rx)	2680.0 MHz (Tx)
2. Pass Bandwidth (= BW)	Fo \pm 15 MHz (2560 ~2590 MHz)	Fo \pm 10 MHz (2670 ~2690 MHz)
3. Insertion Loss @ BW	1.3dB max.	1.3dB max.
4. Ripple @ BW	0.8 dB max.	0.8 dB max.
5. Return Loss (dB)	15.0 min	15.0 min
6. In/Output Impedance	50 Ω	
7. Attenuation	45 dB min.@ 2670 ~ 2690 MHz	45 dB min.@ 2560 ~ 2590 MHz
8. Isolation (Tx - Rx)	45dB min.	
9. Input Power	5W max	
10. Operation Temperature Range	-30 $^{\circ}$ C ~ +70 $^{\circ}$ C	

■ TEST CURVE

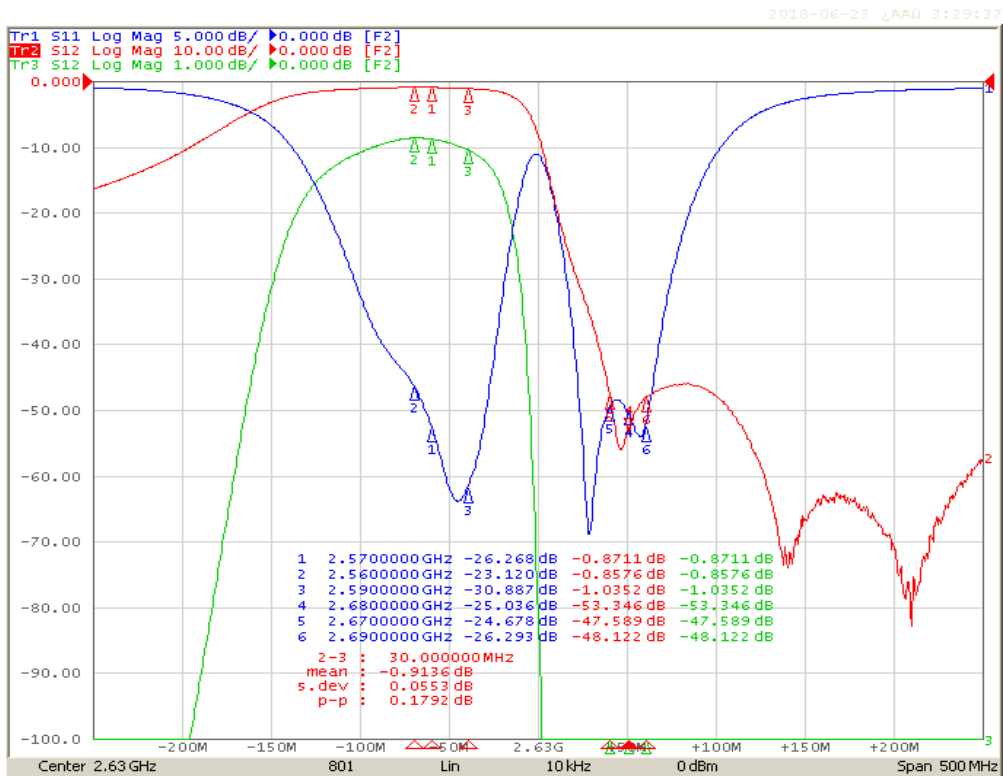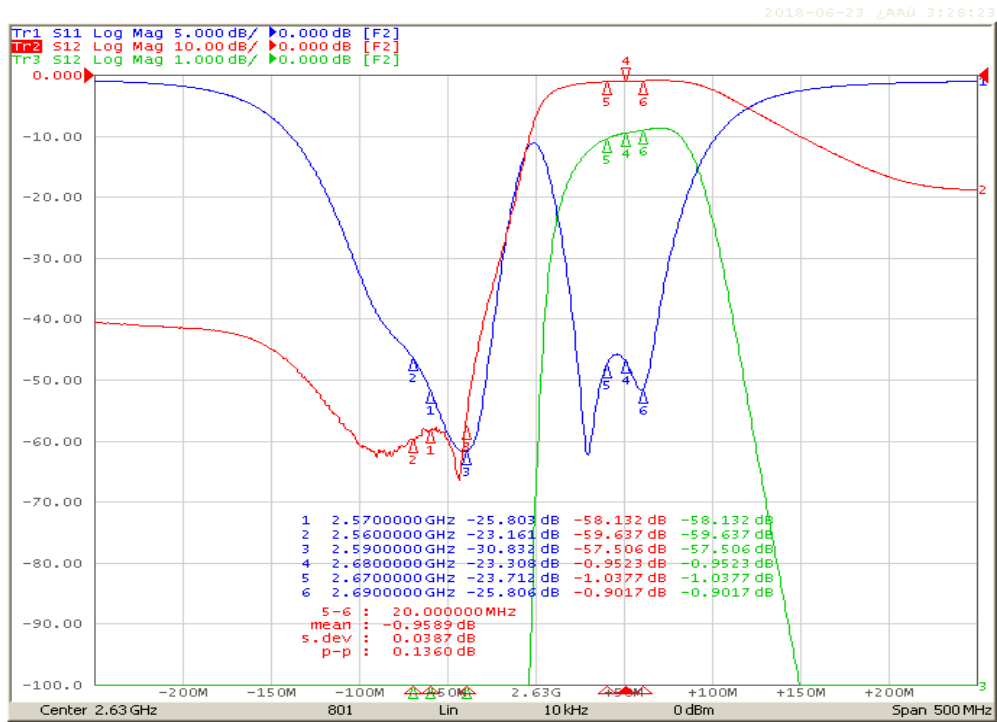

■ SOLDERING TIME PROFILE

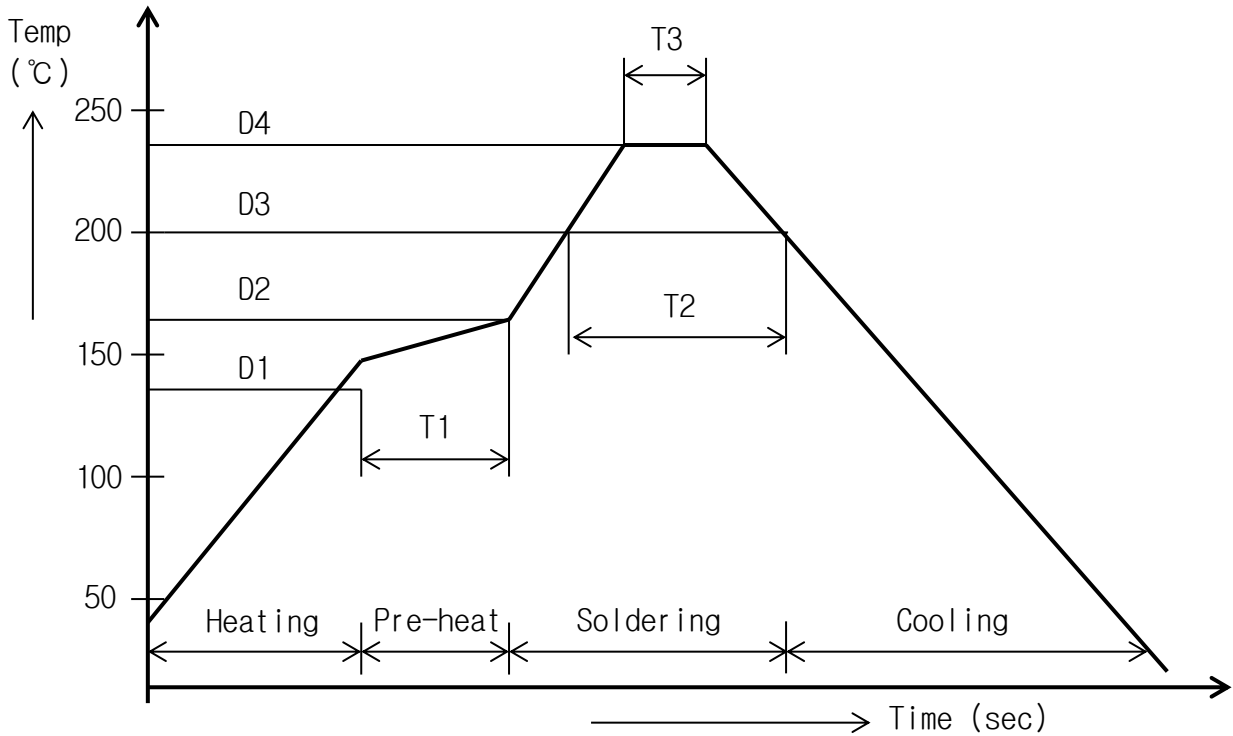

No	ITEM	TEMPERATURE	TIME(SEC)
1	PRE-HEAT	D1 : 140 ~ D2 : 160	T1 : 60±20
2	SOLDERING	D3 : 200	T2 : 20 ~ 30
3	TEMPERATURE	D4 : 230±10	T3 : 7 MAX

1) Soldering Iron Condition

- (1) Temperature : 230°C max
- (2) Duration : 4 sec max (1 part)
- (3) Capacity : 3W max