



PRODUCT SPECIFICATION FOR INFORMATION

- Product Name : LC BANDPASS FILTER
- Part No : HD34366

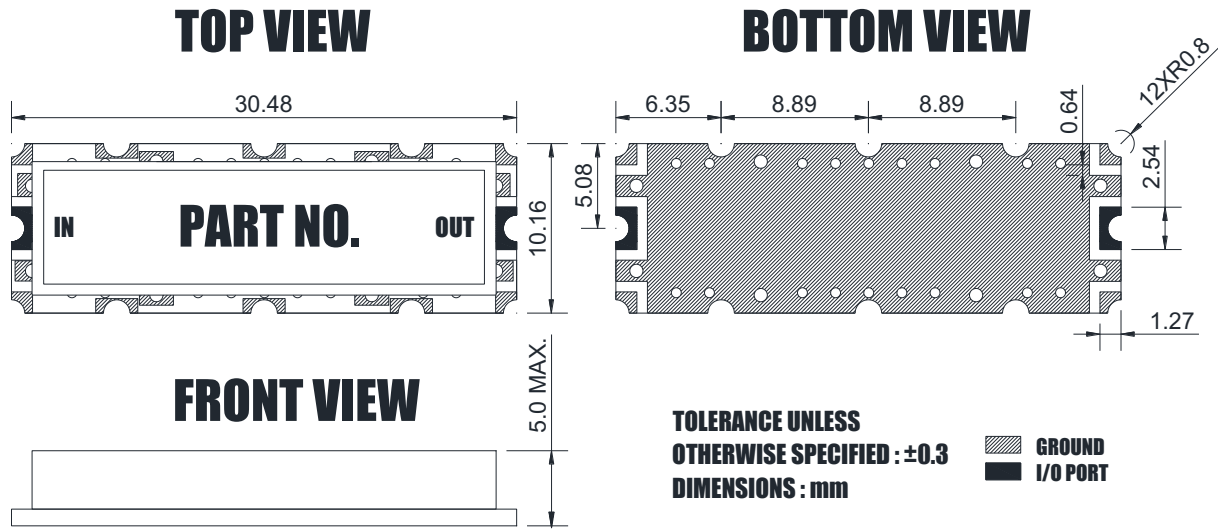


- Center Frequency : 270MHz
- Bandwidth : 140MHz (200 ~ 340MHz)
- Insertion Loss(IL) : 2.0dB Max.
- Ripple in BW : 1.0dB Max
- Return Loss : 16.0dB Min
- Rejection : 25dBc Min. @ DC ~ 170MHz.
10dBc Min. @ 1625MHz.
10dBc Min. @ 2000MHz.
50dBc Min. @ 3000MHz.
- Input Power : 2.0W Max.
- Impedance : 50Ω
- Operating Temperature : -40°C ~ +85°C
- Size : 30 X 10 X 5mm

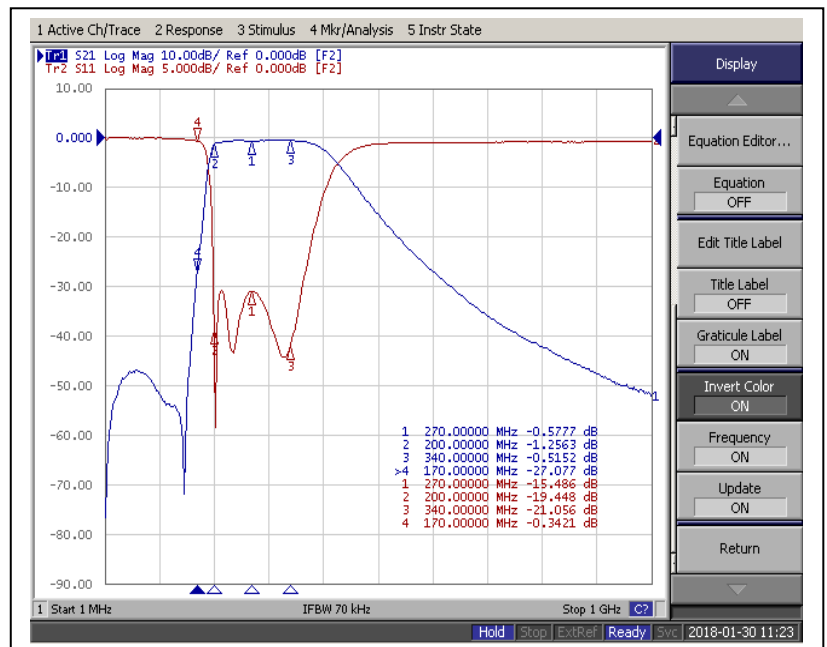

[TEST CURVE]

■ Soldering Time Profile

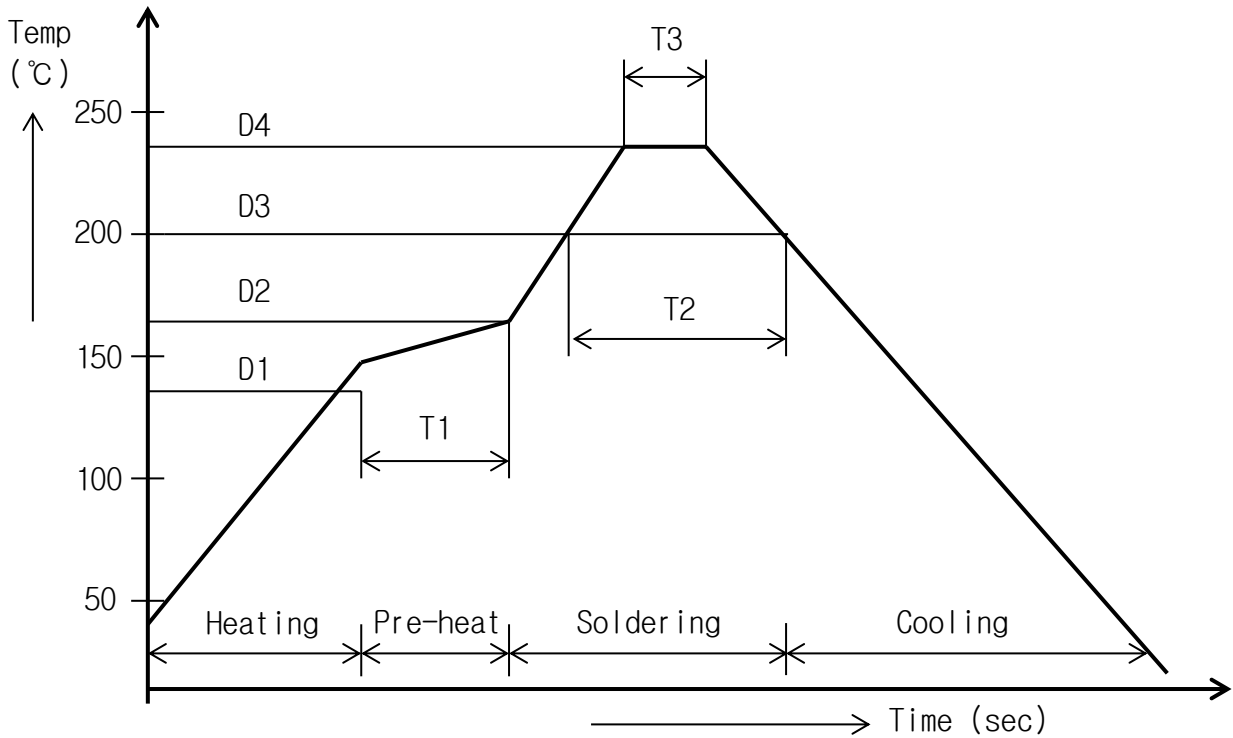

No	ITEM	TEMPERATURE	TIME(SEC)
1	PRE-HEAT	D1 : 140 ~ D2 : 160	T1 : 60±20
2	SOLDERING	D3 : 200	T2 : 20 ~ 30
3	TEMPERATURE	D4 : 230±10	T3 : 7 MAX

1) Soldering Iron Condition

- (1) Temperature : 230°C max
- (2) Duration : 4 sec max (1 part)
- (3) Capacity : 3W max