
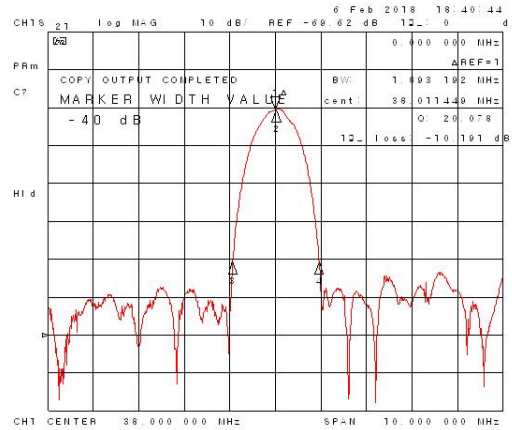


HD34442

Saw Band Pass Filter

1. Typical Performance

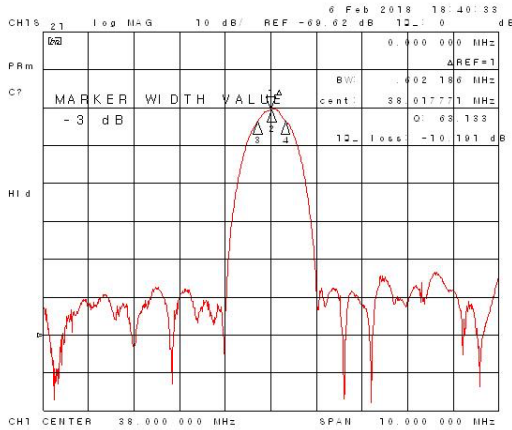


2. Specification

Frequency Characteristics		Minimum	Typical	Maximum
Center Frequency	MHz	-	38.00	-
Insertion Loss	dB	-	9.00	11.00
1dB Bandwidth	MHz	0.20	0.30	-
3dB Bandwidth	MHz	0.45	0.55	-
40dB Bandwidth	MHz	-	2.00	2.50
Attenuation	dB	40	45	-
Amplitude Ripple	dB	-	0.60	1.20
Group Delay Variation	nsec	-	100	200
Absolute Delay	µsec	-	1.7	-
Temperature Coefficient of Frequency	ppm/°C	-	-20	-
Operating Temperature Range	°C	-40 ~ +70		
Package	mm	13.3X6.5 (SMD)		


HD34442

Saw Band Pass Filter

Package Dimension

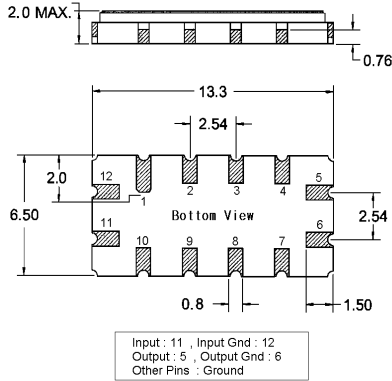



Matching Configuration

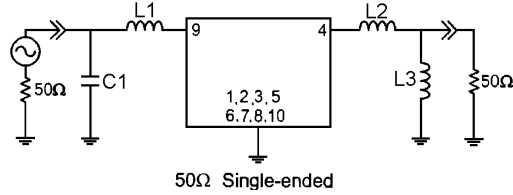

$L1 = 330\text{nH}$, $L2 = 270\text{nH}$, $L3 = 180\text{nH}$, $C = 191\text{pF}$

Source / Load Impedance = 50Ω

Ambient Temperature = 25°C

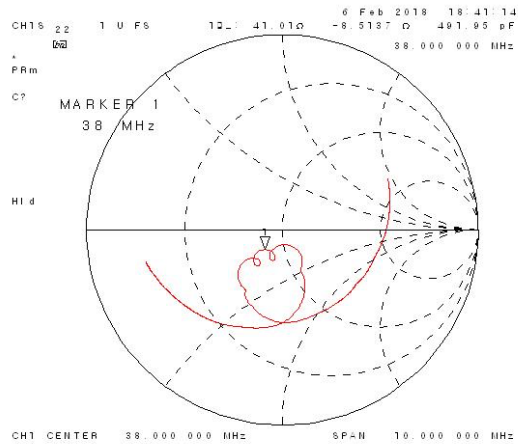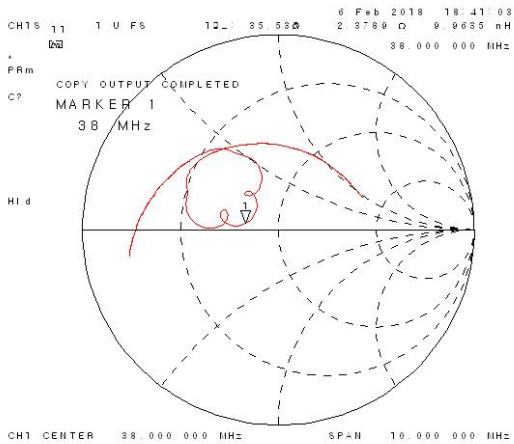

HD34442

Saw Band Pass Filter

